


LED Fabric Lightboxes

Technical Specifications

Size Guide

Minimum: 2000 x 850 x 320mm

Maximum: 2000 x 1000 x 320mm

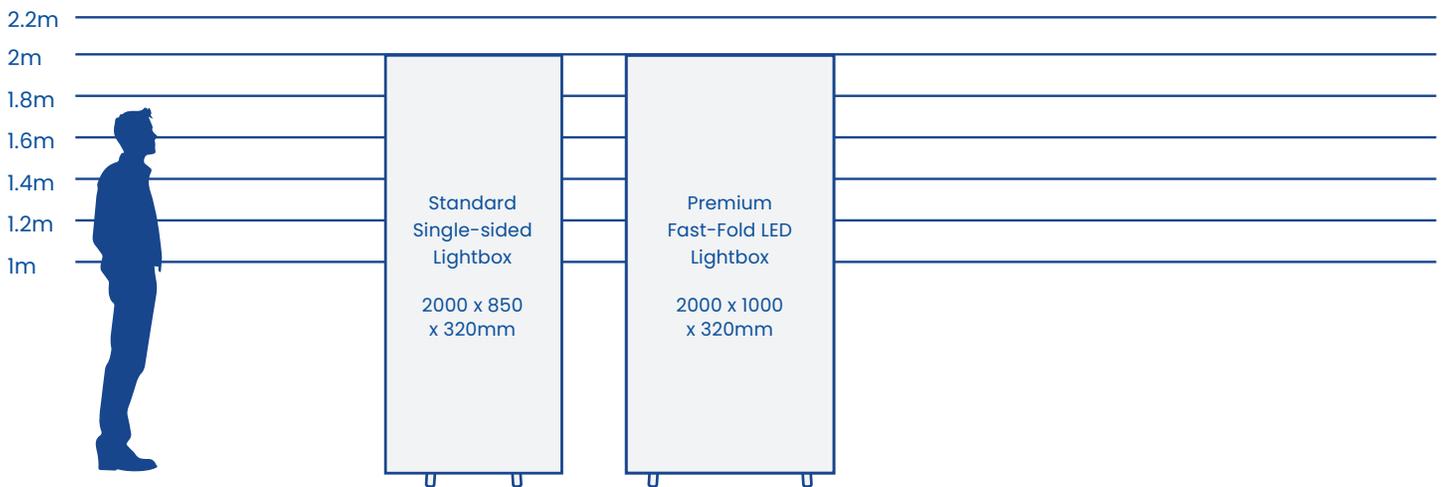

Assembly Instructions

Follow these straightforward steps to display your lightbox:

- Remove the lightbox parts from its case and assemble the frame until all parts are secure and check everything is stable.
- Attach the graphic by pushing the silicone edge into the frame channel using the rubber seal. A credit card or similar flat edge can help guide it in. Pull the graphic taut, but don't overstretch it.
- Plug the lightbox into the mains, switch it on.

Care Instructions

To maintain the quality and longevity of your lightbox:

- Always store your lightbox in its carry case when not in use.
- Avoid pulling the graphic fabric too tight and handle with care during fitting and removal.
- Disconnect from the mains before cleaning, assembling, or storing the lightbox.
- Use a soft, dry cloth to remove dust or light marks. For tougher stains, use a damp cloth, but avoid harsh chemicals that might damage the print or frame.
- Avoid prolonged exposure to moisture or extreme temperatures, indoor use only.

Additional Information

Materials Information	<p>190gsm UFabrik Soft Backlit Textile</p> <p>A woven soft backlit textile that is bruise and wrinkle-free with brilliant white point. Has a soft touch and feel and is PVC-free and REACH compliant.</p> <p>Substrate: 100% Polyester Weight: 190gsm / 5.6oz/yd Shrinkage: 190°C/45s <2% Fire retardancy: B1/NFPA 701 EN13501-1/DIN 4102-1 Recommend Fixation Temperature: 190-200°C,45-60s Yellowing Temperature: ≥ 210°C Application: Indoor</p>
Frame Options	<p>Standard Single-sided Lightbox</p> <p>The Standard Single-Sided Lightbox features a slim 60mm aluminium profile and long-lasting, low-energy LED lighting. Two twist-out feet provide stability, while a rollable blackout panel with pre-fixed LED strips ensures simple setup. Mains powered at 55w, it delivers consistent, reliable illumination.</p> <p>Premium Fast-Fold LED Lightbox</p> <p>The Premium Fast-Fold LED Lightbox is built with a sleek 85mm aluminium profile and inner support bar for strength. Integrated frame magnets allow multiple units to connect seamlessly, and twist-out feet add stability. Supplied with a wheeled, padded carry bag, it runs at 56w and houses the transformers internally for clean, mains-powered illumination without a bulky external pack.</p>
Sizes	<p>Standard Single-sided Lightbox H 2000 x W 850 x D 320mm</p> <p>Premium Fast-Fold LED Lightbox H 2000 x W 1000 x D 320mm</p>
Printing Process	<p>Dye-sublimation printing using heat to set vibrant inks into the fabric.</p>
Environment	<p>Suitable for indoor use only.</p>
Sustainability	<p>Fabric, LED components and aluminium frames may require specialist recycling facilities. Please check with your local authority for appropriate disposal or recycling options.</p>